
Wall Cabinet Assembly Instruction


(Item: W2430-W3330 W2436-W3336)

			,		·		
	1 8pcs Ø4x16mm Flat head screw	2 4pcs Ø4x19mm Round head screw	3 8pcs Ø3.5x14mm Color galvanized screw with flat head	3 16pcs Ø3.5x16mm Color galvanized screw with flat head	4 4pcs Ø3.5x35mm Black screw with flat head	5 4pcs 1-1/4" Hinge	6 8pcs 6mm Shelf clips
Hardware list		⊲ишишш [}					
Assembly tools required	Screw driver	Rubber			9 4pcs 40mmx40mm Bracket rainbow 90°	8 2pes 97 Bumper	7 Zest L-shape bracket
Cabinet Part List	A Front frame	B Side panel(2)	C Top-Bottom panel	D Back panel	E Adjustable shelf	F Door	


Step 1: With front frame (A) of cabinet lay down on clean and soft surface then put glue into groove.




Step 2: Install side panel. Insert two side panels (B) into groove of front frame (A) until side panel (B) and front frame (A) even.




Step 3: Install top and bottom panel. Insert top and bottom panel (C) into groove of side panel (B) until it into the groove of front frame (A).




Step 4: Install back panel. Insert back panel (D) into groove of left and right side panel (B) and screw L-shape bracket to the frame and top&bottom panel.




Step 5 : Screw rainbow bracket into front frame(A) and side panel(B).





Step 6 : Install screw(5) \emptyset 3.5x35mm into back panel (D), then nails side panel(B) and back panel(C) using






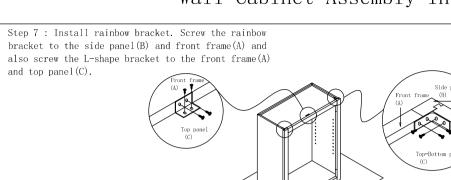






Step 9: Install adjustable shelf. Put adjustable shelf (E) to the shelf clip.



Step 10: Install door. Screw the hinge to the door (F) and front frame (A).

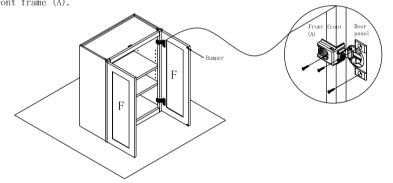

Step 11: Finish installation of cabinet.

